



# CFM500M SERIES 500 WATT MEDICAL AC-DC POWER SUPPLY WITH PFC

## Features

- Universal Input Range 80~264V<sub>ac</sub>
- High Efficiency up to 94.5%
- 3"x 5" Compact Size
- Class I & II
- No Load Power Consumption<0.5W
- Peak Power Operation up to 600Watt for 5s
- Approval IEC/EN/UL 60601-1 2 MOPP
- Approval EN 55011, 47 CFR FCC Part 18
- Active PFC Meets EN 61000-3-2
- Design Meets IEC/EN 60335-1
- Operating Altitude 5000m
- High Power Density up to 21.64W/Inch<sup>3</sup>
- 390W Natural, 470 ~ 500W Conduction Convection
- Over Temperature Protection
- PS On/Off Remote Control
- Power Good & Power Fail Signal
- +5V Stand-by, 12V Fan Output
- Low Inrush Current



| MODEL NUMBER                   | OUTPUT VOLTAGE | OUTPUT CURRENT |             |        | VOLTAGE ACCURACY NOTE2 | RIPPLE & NOISE NOTE3 | VOLTAGE ADJ. RANGE | LINE REGULATION NOTE4 | LOAD REGULATION NOTE5 | %EFF. (Typ.) |      |
|--------------------------------|----------------|----------------|-------------|--------|------------------------|----------------------|--------------------|-----------------------|-----------------------|--------------|------|
|                                |                | NOTE1          |             | COVER  |                        |                      |                    |                       |                       |              | OPEN |
|                                |                | With FAN       | Without FAN |        |                        |                      |                    |                       |                       |              |      |
| CFM500M120                     | 12 V           | 41.67A         | 27.5A       | 25A    | ±1%                    | 120mV                | 11.4~12.6 V        | ±0.5%                 | ±1%                   | 92.5%        |      |
| CFM500M180                     | 18 V           | 27.78A         | 18.33A      | 16.67A | ±1%                    | 150mV                | 17.1~18.9 V        | ±0.5%                 | ±1%                   | 93.5%        |      |
| CFM500M240                     | 24 V           | 20.83A         | 17.08A      | 15.83A | ±1%                    | 150mV                | 22.8~25.2 V        | ±0.5%                 | ±1%                   | 94.5%        |      |
| CFM500M360                     | 36 V           | 13.89A         | 11.39A      | 10.56A | ±1%                    | 200mV                | 34.2~37.8 V        | ±0.5%                 | ±1%                   | 94.5%        |      |
| CFM500M480                     | 48 V           | 10.42A         | 8.54A       | 7.92A  | ±1%                    | 250mV                | 45.6~50.4 V        | ±0.5%                 | ±1%                   | 94.5%        |      |
| <b>Stand-by Output Voltage</b> |                |                |             |        |                        |                      |                    |                       |                       |              |      |
| All                            | +5V            | 1A             |             |        | ±3%                    | 100mV                | ---                | ±1%                   | ±5%                   | ---          |      |
| <b>Fan Output Voltage</b>      |                |                |             |        |                        |                      |                    |                       |                       |              |      |
| All                            | +12V           | 0.5A (NOTE 6)  |             |        | ---                    | ---                  | ---                | ---                   | ---                   | ---          |      |

Note:

1. Forced air convection with 21CFM Fan.
2. Voltage accuracy is set at 100% full load and 25°C Ta.
3. Add a 0.1uF ceramic capacitor and a 10uF E.L. capacitor to output for ripple & noise measuring @20MHz BW.
4. Line regulation is measured from high line to low line with 100% full load.
5. Load regulation is measured from 10% to 100% full load.
6. Fan output can only operate normal when the stand-by output is above 0.5A.

## PART NUMBER

| Series | Number of Outputs | Nominal Output Voltage  | Type                                    | Output Terminal                   |
|--------|-------------------|---|---|-----------------------------------|
| CFM500 | X                 | XXX   | X (Option)                              | -X(Option)                        |
| CFM500 | M : Medical       | 120 : 12V<br>180 : 18V<br>240 : 24V<br>360 : 36V<br>480 : 48V | None : With Baseplate<br>C : With Cover | None : Vertical<br>R : Horizontal |

Part Number Example:

- CFM500M120:** With Baseplate, 500W, 12Vdc Output, Vertical Type Terminal
- CFM500M120C:** With Cover, 500W, 12Vdc Output, Vertical Type Terminal
- CFM500M120-R:** With Baseplate, 500W, 12Vdc Output, Horizontal Type Terminal
- CFM500M120C-R:** With Cover, 500W, 12Vdc Output, Horizontal Type Terminal



# CFM500M Series

## TECHNICAL SPECIFICATIONS

(All specifications are typical at nominal input, full load at 25°C unless otherwise noted.)

### ABSOLUTE MAXIMUM RATINGS

| PARAMETER                | NOTES and CONDITIONS   | Device | Min. | Typ. | Max. | Units           |
|--------------------------|--|--------|------|------|------|-----------------|
| Input Voltage            | Safety approvals only to the AC input                              | All    | 80   |      | 264  | V <sub>ac</sub> |
| Operating Temperature    | See Derating Curve   | All    | -40  |      | 85   | °C              |
| Maximum Case Temperature | At the Center of Base Plate<br>(T <sub>c</sub> = Case temperature) | All    | -40  |      | 85   | °C              |
| Storage Temperature      |  | All    | -40  |      | 85   | °C              |
| Operating Altitude       |  | All    |      |      | 5000 | m               |

### INPUT CHARACTERISTICS

| PARAMETER               | NOTES and CONDITIONS                                     | Device | Min. | Typ. | Max. | Units           |
|-------------------------|--|--------|------|------|------|-----------------|
| Operating Voltage Range |  | All    | 100  |      | 240  | V <sub>ac</sub> |
| Input Frequency Range   |  | All    | 47   |      | 63   | Hz              |
| Maximum Input Current   | 100% Full Load, V <sub>in</sub> =100V <sub>ac</sub>      | All    |      |      | 6    | A               |
| Power Factor            | V <sub>in</sub> =230V <sub>ac</sub>                      | All    |      | 0.97 |      |                 |
| Leakage Current (Earth) |  | All    |      |      | 300  | uA              |
| Leakage Current (Touch) |  | All    |      |      | 100  | uA              |
| Inrush Current          | V <sub>in</sub> =240V <sub>ac</sub> , Cold start at 25°C | All    |      | 8.5  |      | A               |

### OUTPUT CHARACTERISTICS

| PARAMETER                      | NOTES and CONDITIONS  | Device     | Min.  | Typ. | Max.  | Units           |
|--------------------------------|---|------------|-------|------|-------|-----------------|
| Output Voltage Set Point       | V <sub>in</sub> =Nominal V <sub>in</sub> , I <sub>o</sub> =I <sub>o</sub> max., T <sub>c</sub> =25°C  | CFM500M120 | 11.88 | 12   | 12.12 | V <sub>dc</sub> |
|                                |   | CFM500M180 | 17.82 | 18   | 18.18 |                 |
|                                |   | CFM500M240 | 23.76 | 24   | 24.24 |                 |
|                                |   | CFM500M360 | 35.64 | 36   | 36.36 |                 |
|                                |   | CFM500M480 | 47.52 | 48   | 48.48 |                 |
| Operating Output Current Range | V <sub>in</sub> =80V <sub>ac</sub> ~264V <sub>ac</sub> , See Derating Curve   | CFM500M120 |       |      | 41.67 | A               |
|                                |   | CFM500M180 |       |      | 27.78 |                 |
|                                |   | CFM500M240 |       |      | 20.83 |                 |
|                                |   | CFM500M360 |       |      | 13.89 |                 |
|                                |   | CFM500M480 |       |      | 10.42 |                 |
| Holdup Time                    | V <sub>in</sub> =115V <sub>ac</sub>   | All        |       | 16   |       | ms              |
| Output Voltage Regulation      |   |            |       |      |       |                 |
| Load Regulation                | 10% to 100% full load   | All        |       |      | ±1.0  | %               |
| Line Regulation                | V <sub>in</sub> =High line to low line  | All        |       |      | ±0.5  | %               |
| Over Voltage Protection        | Latch off (AC recycle to reset)   | CFM500M120 |       |      | 16    | V <sub>dc</sub> |
|                                |   | CFM500M180 |       |      | 30    |                 |
|                                |   | CFM500M240 |       |      | 35    |                 |
|                                |   | CFM500M360 |       |      | 50    |                 |
|                                |   | CFM500M480 |       |      | 63    |                 |
| Over Current Protection        | Auto recovery   | All        | 120   |      | 190   | %               |
| Peak Power                     | 1. V <sub>in</sub> =115V <sub>ac</sub> and 230V <sub>ac</sub><br>2. Ambient temperature=25°C<br>3. Peak power should be less than 5seconds, with a maximum 10% duty cycle, peak power function by 120% load 5S and 75% load 45S | All        |       | 120  |       | %               |
| Short Circuit Protection       | Auto recovery   | All        |       |      |       |                 |
| Over Temperature Protection    | Auto recovery   | All        |       |      |       |                 |



## CFM500M Series

| PARAMETER               | NOTES and CONDITIONS   | Device     | Min. | Typ. | Max.  | Units    |
|-------------------------|--|------------|------|------|-------|----------|
| Output Ripple and Noise | 1. Add a 0.1uF ceramic capacitor and a 10uF aluminum electrolytic capacitor to output<br>2. Oscilloscope is 20MHz bandwidth<br>3. Ambient temperature=25°C | CFM500M120 |      |      | 120   | mV       |
|                         |  | CFM500M180 |      |      | 150   |          |
|                         |  | CFM500M240 |      |      | 150   |          |
|                         |  | CFM500M360 |      |      | 200   |          |
|                         |  | CFM500M480 |      |      | 250   |          |
| Load Capacitance        | 1. $V_{in}=115V_{ac}$ and $230V_{ac}$<br>2. Output is 100% full load<br>3. Ambient temperature=25°C  | CFM500M120 |      |      | 42900 | uF       |
|                         |  | CFM500M180 |      |      | 28600 |          |
|                         |  | CFM500M240 |      |      | 20800 |          |
|                         |  | CFM500M360 |      |      | 14000 |          |
|                         |  | CFM500M480 |      |      | 10800 |          |
| Efficiency              | 1. $V_{in}=230V_{ac}$<br>2. Output is 100% full load<br>3. Ambient temperature=25°C  | CFM500M120 |      | 92.5 |       | %        |
|                         |  | CFM500M180 |      | 93.5 |       |          |
|                         |  | CFM500M240 |      | 94.5 |       |          |
|                         |  | CFM500M360 |      | 94.5 |       |          |
|                         |  | CFM500M480 |      | 94.5 |       |          |
| PS-On Signal            | Power on   | All        | 0    |      | 2     | $V_{dc}$ |
|                         | Power off (PS-ON and GND open)   |            |      | 4    |       |          |
|                         | Power on (PS-ON and GND short)   |            |      | 10   |       | mA       |
|                         | Power-off (PS-ON and GND open)   |            |      | 0    |       |          |
| Power Good (PG)         | 1. $V_{in}=80V_{ac}\sim 264V_{ac}$<br>2. Output is 100% full load<br>3. The TTL goes high after power set up   | All        | 100  |      | 500   | ms       |
| Power Fail (PF)         | 1. $V_{in}=80V_{ac}\sim 264V_{ac}$<br>2. Output is 100% full load<br>3. The TTL goes low before $V_o$ below 90% rated value                                | All        | 1    | 10   |       | ms       |

### ISOLATION CHARACTERISTICS

| PARAMETER                | NOTES and CONDITIONS                    | Device | Min. | Typ. | Max. | Units    |
|--------------------------|---|--------|------|------|------|----------|
| Input to Output          | 1 Minute                                | All    |      |      | 4000 | $V_{ac}$ |
| Input to Earth (Ground)  | 1 Minute (without dielectric breakdown) | All    |      |      | 1800 | $V_{ac}$ |
| Output to Earth (Ground) | 1 Minute (without dielectric breakdown) | All    |      |      | 1800 | $V_{ac}$ |
| Isolation Resistance     | Input to output                         | All    | 100  |      |      | MΩ       |

### FEATURE CHARACTERISTICS

| PARAMETER                 | NOTES and CONDITIONS              | Device | Min. | Typ. | Max. | Units |
|---------------------------|-----------------------------------|--------|------|------|------|-------|
| Switching Frequency       | $P_{out}=\text{max. rated power}$ | All    |      | 65   |      | kHz   |
| Output Voltage adjustment |                                   | All    | -5   |      | +5   | %     |

### GENERAL SPECIFICATIONS

| PARAMETER  | NOTES and CONDITIONS  | Device | Min.  | Typ. | Max. | Units   |
|------------|---|--------|---|------|------|---------|
| MTBF       | $I_o=100\%$ ; $T_a=25^\circ\text{C}$ per MIL-HDBK-217F  | All    |   | 200  |      | k hours |
| Humidity   | Non-condensing  | All    |   |      | 93   | % RH    |
| Shock      | Meet MIL-STD-810F Table 516.5, Table 516.5-I 10ms, each axis 3 times( $\pm X$ 、 $\pm Y$ 、 $\pm Z$ axis) | All    |   | 75   |      | g       |
| Vibration  | Meet MIL-STD-810F Table 514.5C-VIII, 15~2000Hz, X、Y、Z axis, 1 hour (each axis),. Total 3 hrs.           | All    |   | 4    |      | g       |
| Weight     | Baseplate versions  | All    |   | 515  |      | g       |
|            | Covered versions  |        |   | 635  |      |         |
| Dimensions | With baseplate  | All    | 5.000x3.000x1.540 Inches<br>(127.00x76.20x39.10 mm) |      |      |         |
|            | C (with cover)  |        | 5.354x3.425x1.673 Inches<br>(136.00x87.00x42.50 mm) |      |      |         |



# CFM500M Series

## GENERAL SPECIFICATIONS


|  |  |  |
|--|--|--|
| <b>Safety</b>                                    | Class I & II<br>IEC 60601-1:2005, IEC 60601-1:2005/AMD1:2012, IEC 60601-1:2005/AMD2:2020<br>EN 60601-1:2006+A1+A12+A2<br>ANSI/AAMI ES60601-1 (2005/(R)2012+A1:2012, C1:2009/(R)2012+A2:2010/(R)2012) | Ed 3.2                                   |
| <b>EMC Emission</b>                              | EN 55011: 2016+A1:2017+A11:2020+A2:2021, EN IEC 61000-3-2:2019+A1: 2021<br>IEC 61000-3-3:2013+A2: 2021, 47 CFR FCC Part 18   |  |
| Conducted Disturbance                            | EN 55011: 2016+A1 :2017+A11 :2020+A2 :2021, 47 CFR FCC Part 18   | Class B                                  |
| Radiated Disturbance                             | EN 55011: 2016+A1 :2017+A11 :2020+A2 :2021, 47 CFR FCC Part 18<br>(Class II Only Meets to Class A, Class B Must Add Parts, Refer to Application Note)  | Class B                                  |
| Harmonic Current Emissions                       | EN IEC 61000-3-2:2019+A1:2021  | Class A, C, D                            |
| Voltage Fluctuations & Flicker                   | IEC 61000-3-3:2013+A2: 2021  |  |
| <b>EMC Immunity</b>                              | EN 60601-1-2:2015+A1: 2021, IEC 61000-4-2, 3, 4, 5, 6, 8, 11   | Ed 4.1                                   |
| Electrostatic Discharge (ESD)                    | IEC 61000-4-2:2009, Air Discharge: ±15kV, Contact Discharge: ±8kV  | Criterion A                              |
| Radio-Frequency, Continuous Radiated Disturbance | IEC 61000-4-3:2020   | Criterion A                              |
| Electrical Fast Transient (EFT)                  | IEC 61000-4-4:2012, ±2kV   | Criterion A                              |
| Surge  | IEC 61000-4-5:2014+A1:2017, L-N: ±0.5kV, ±1kV, L-E(Ground): ±0.5kV, ±1kV, ±2kV   | Criterion A                              |
| Conducted Disturbances, Induced by RF Fields     | IEC 61000-4-6:2014+AC:2015   | Criterion A                              |
| Power Frequency Magnetic Field                   | IEC 61000-4-8:2010   | Criterion A                              |
| Voltage Dips                                     | IEC 61000-4-11:2020, Dip: 30% Reduction, Dip >95% Reduction  | Criterion A                              |
| Voltage Interruptions                            | IEC 61000-4-11:2020, >95% Reduction  | Criterion B                              |
| Application Note Link                            |  | <a href="#">CFM500M Series App Notes</a> |

## CHARACTERISTIC CURVE

### Power Derating Curve


#### Forced Air Flow

##### Output power & Input voltage

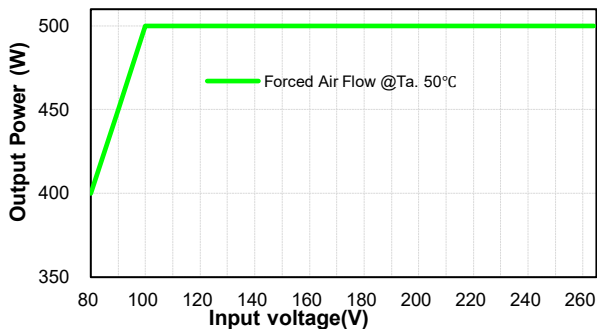


#### Forced Air Flow

##### Output power vs Ambient Temperature

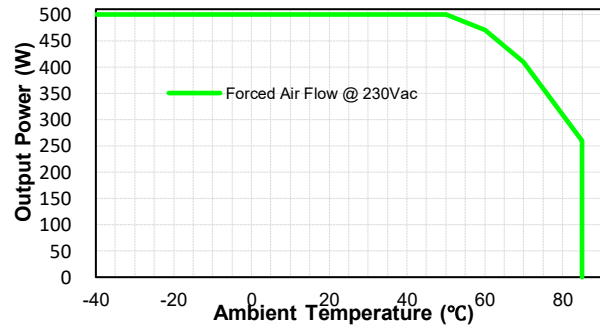


#### Natural Convection

##### Output power & Input Voltage

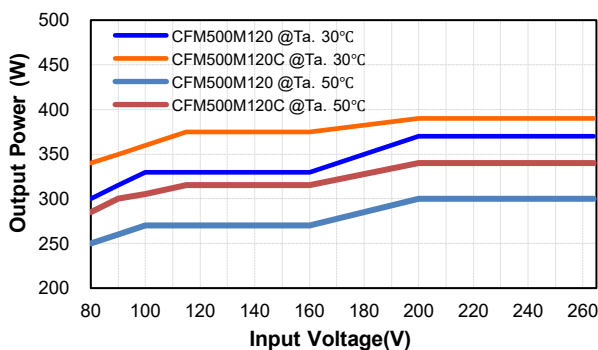

#### Natural Convection


##### Output power vs Ambient Temperature

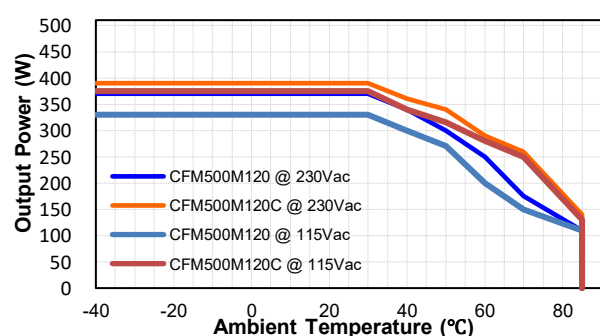




# CFM500M Series


Output power & Input Voltage

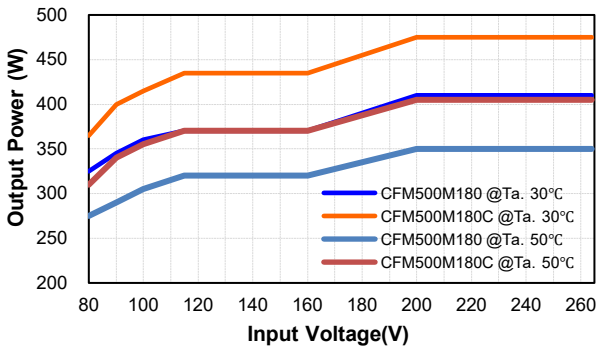


Output power vs Ambient Temperature

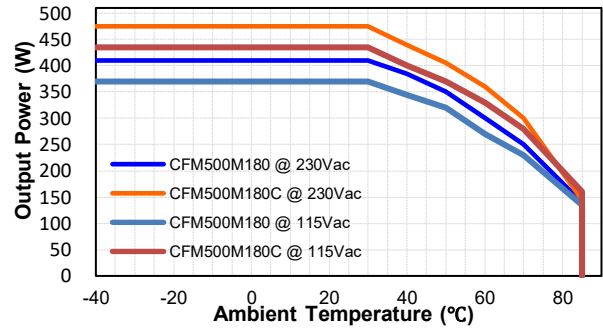


Output power & Input Voltage

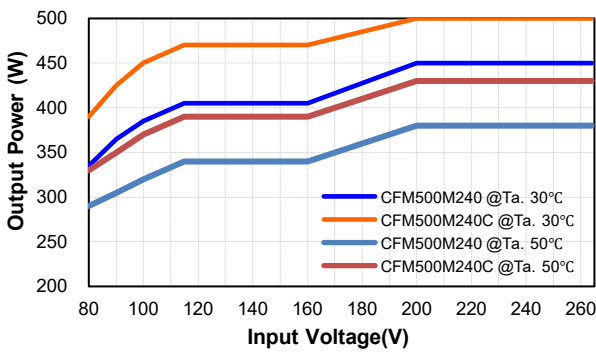


Output power vs Ambient Temperature

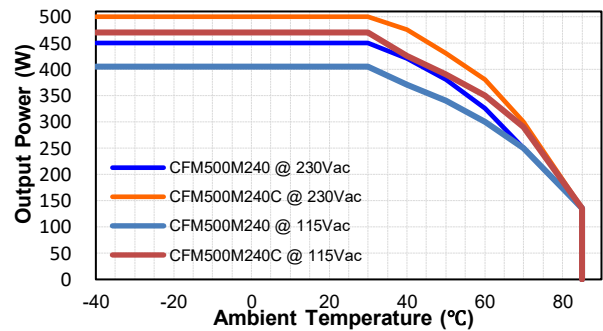


Output power & Input Voltage

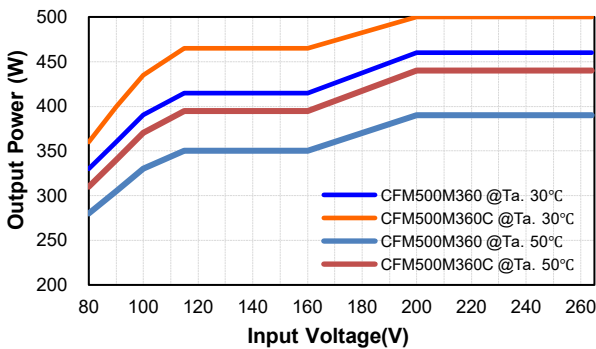


Output power vs Ambient Temperature

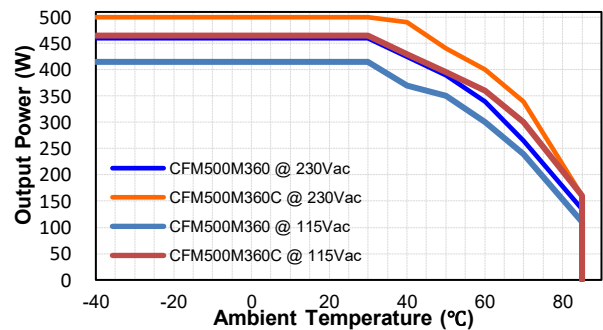

Output power & Input Voltage

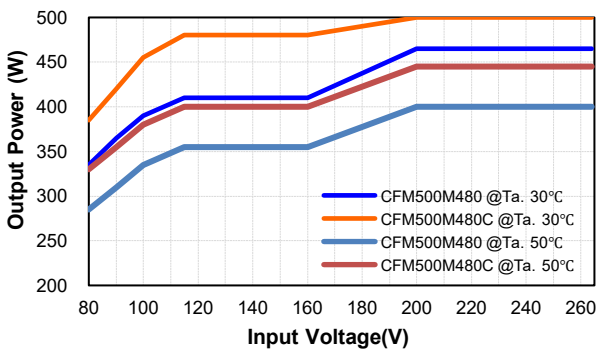


Output power vs Ambient Temperature

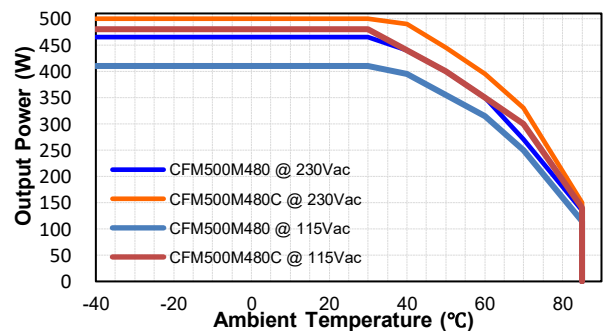




**Conduction Convection with External Baseplate  
(48x24.8x0.12cm)**

**Output power & Input Voltage**

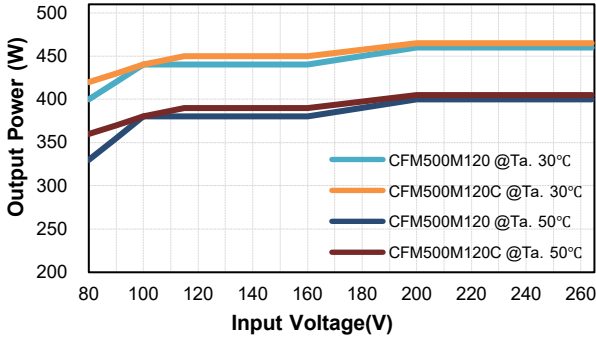


**CFM500M Series  
Conduction Convection with External Baseplate  
(48x24.8x0.12cm)**


**Output power vs Ambient Temperature**

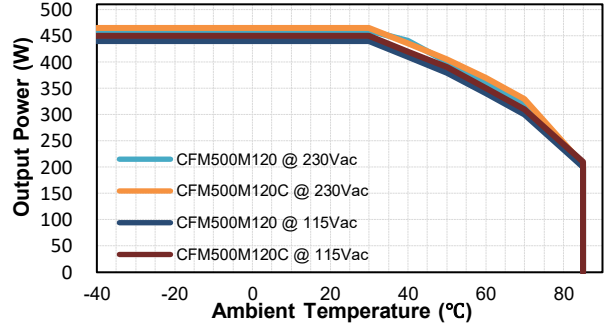


**Output power & Input Voltage**

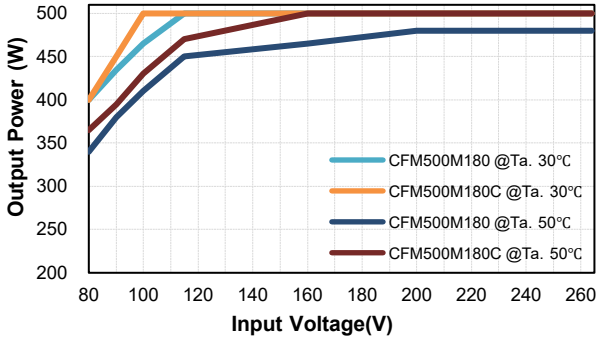


**Output power vs Ambient Temperature**

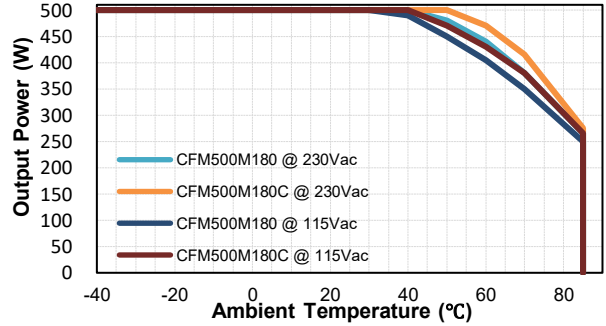


**Output power & Input Voltage**

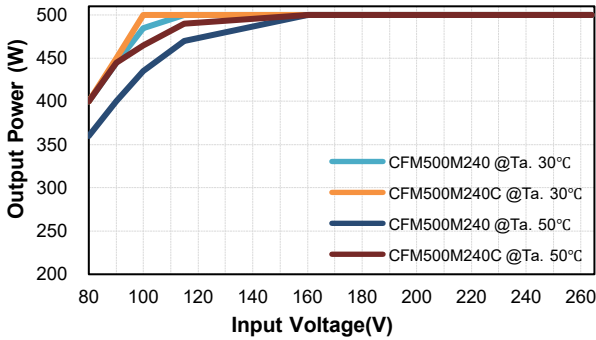


**Output power vs Ambient Temperature**

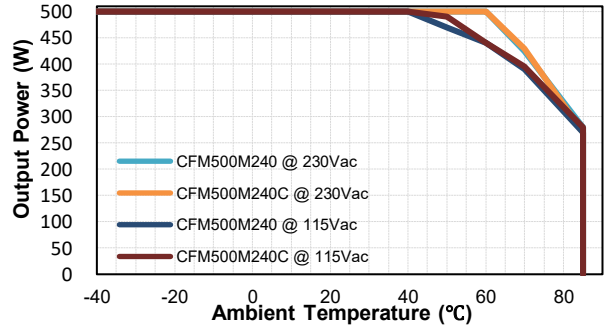

**Output power & Input Voltage**

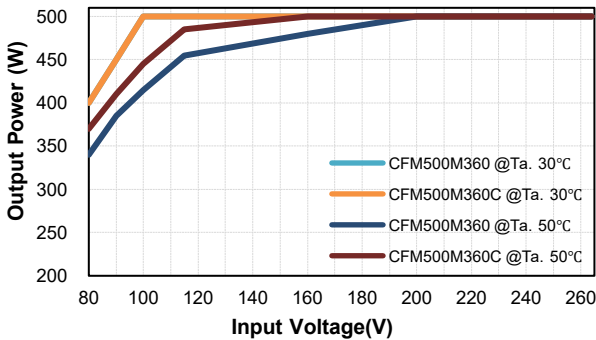


**Output power vs Ambient Temperature**

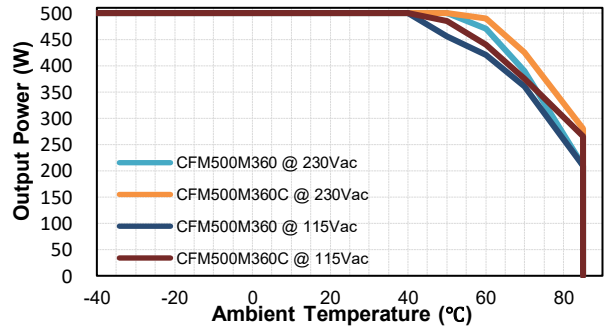




# CFM500M Series


Output power & Input Voltage

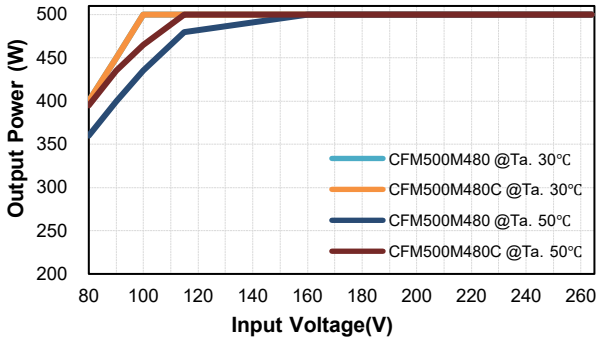

Output power vs Ambient Temperature

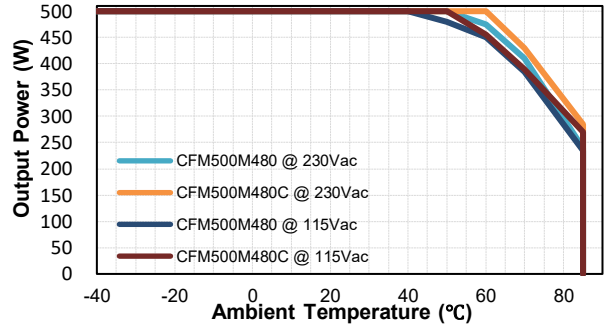


Output Power vs Case Temperature (Tc)

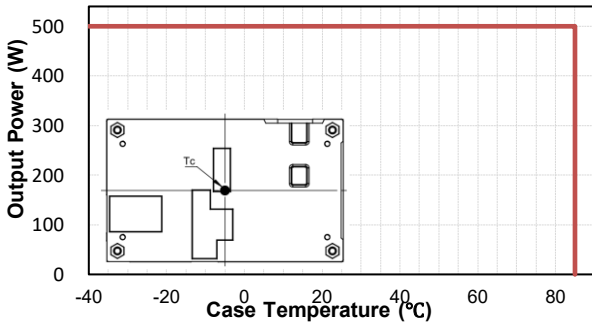


## Performance Data


CFM500M120 (Eff Vs Io)

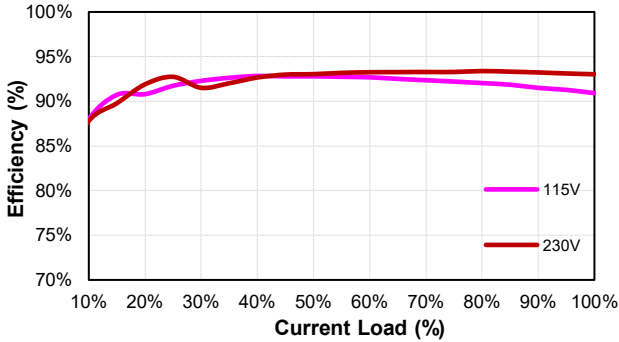


CFM500M180 (Eff Vs Io)

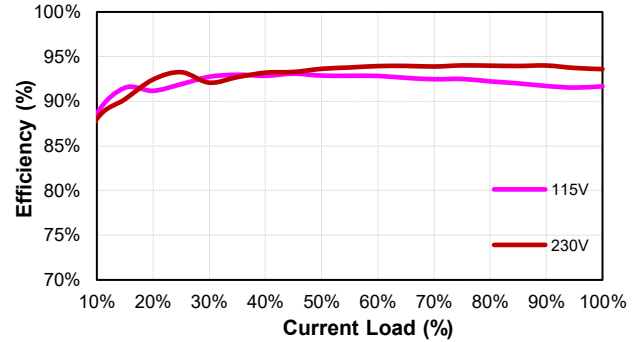

CFM500M240 (Eff Vs Io)

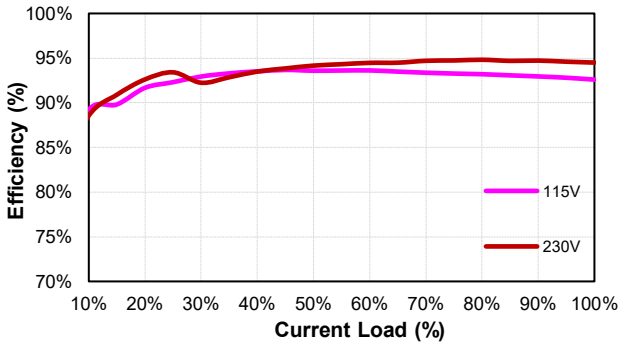


CFM500M360 (Eff Vs Io)

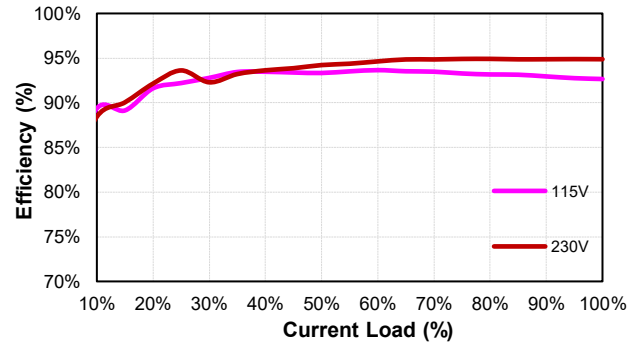



## CFM500M Series



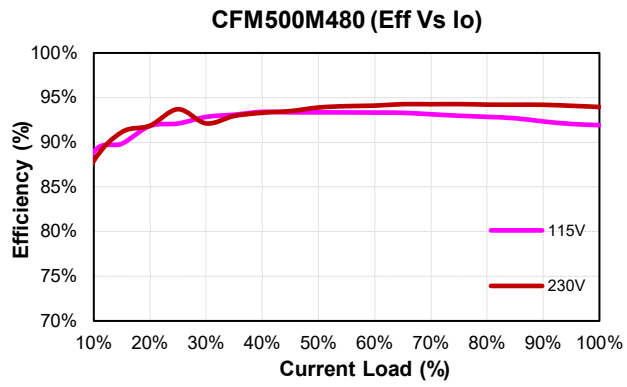






# CFM500M Series

## MECHANICAL SPECIFICATION

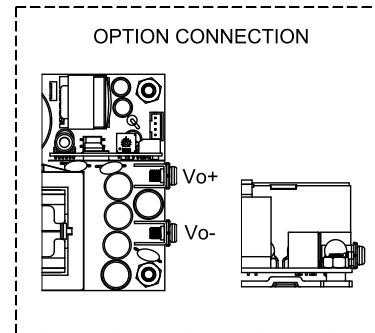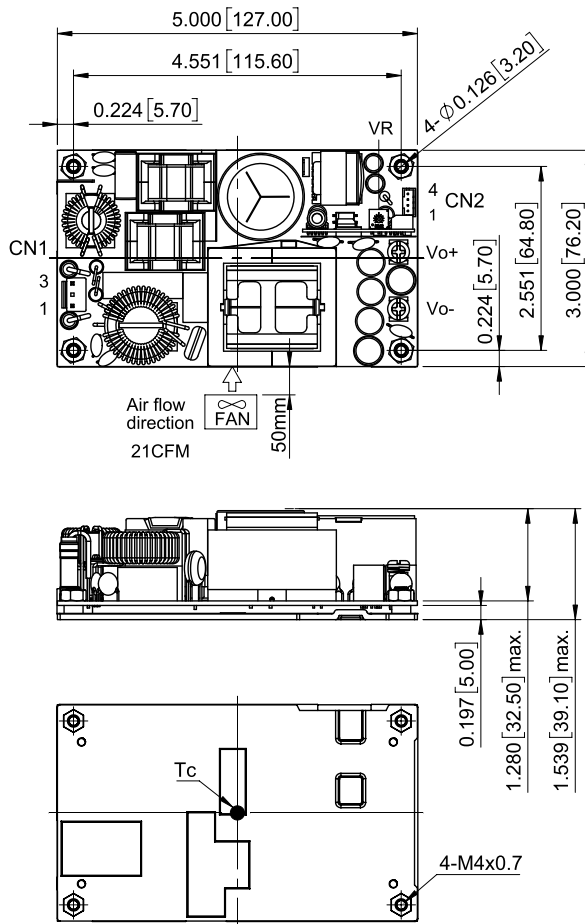

### CFM500MXXX

All Dimensions in Inches[mm]

Tolerance Inches: x.xxx=±0.020

Millimeters: x.xx=±0.50

AC Input Connector(CN1):JST B2P3-VH or equivalent

| Pin | Function | Mating Housing              | Terminal                          |
|-----|----------|-----------------------------|-----------------------------------|
| 1   | ACL      | JST VHR-3N<br>or equivalent | JST SVH-41T-P1.1<br>or equivalent |
| 2   | -        |                             |                                   |
| 3   | ACN      |                             |                                   |

DC Output Connector(CN2):TKP P110I-04 or equivalent

| Pin | Function | Mating Housing             | Terminal                            |
|-----|----------|----------------------------|-------------------------------------|
| 1   | GND      | JST PHR-4<br>or equivalent | JST SPH-002T-P0.5L<br>or equivalent |
| 2   | +5VSB    |                            |                                     |
| 3   | GND      |                            |                                     |
| 4   | +12V-FAN |                            |                                     |

DC Output Connector(CN3):TKP P110L-07 or equivalent

| Pin | Function | Mating Housing             | Terminal                            |
|-----|----------|----------------------------|-------------------------------------|
| 1   | GND      | JST PHR-7<br>or equivalent | JST SPH-002T-P0.5L<br>or equivalent |
| 2   | PG/PF    |                            |                                     |
| 3   | FAN-EN   |                            |                                     |
| 4   | PS-ON    |                            |                                     |
| 5   | -Sense   |                            |                                     |
| 6   | +Sense   |                            |                                     |
| 7   | NA       |                            |                                     |






DC Output Connector:KANG YANG PCB-58M4 or equivalent

| Function | The screw locked torque |
|----------|-------------------------|
| Vo-      | M4 7kgf-cm              |
| Vo+      |                         |



# CFM500M Series

## MECHANICAL SPECIFICATION

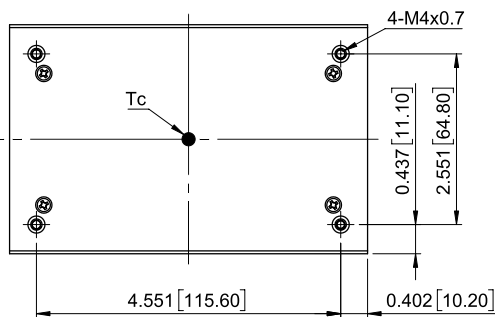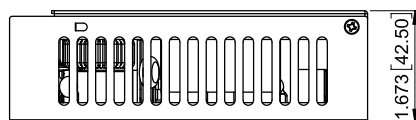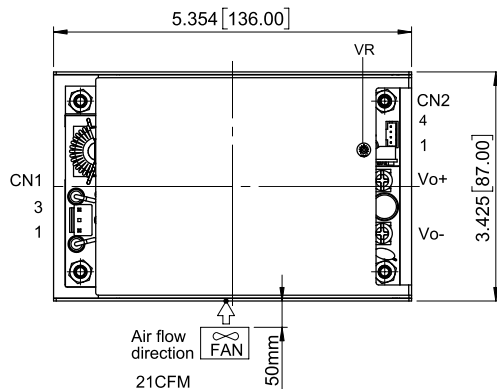

## CFM500MXXXC

All Dimensions in Inches[mm]  
Tolerance Inches: x.xxx $\pm$ 0.020  
Millimeters: x.xx $\pm$ 0.50

AC Input Connector(CN1):JST B2P3-VH or equivalent

| Pin | Function | Mating Housing           | Terminal                       |
|-----|----------|--------------------------|--------------------------------|
| 1   | ACL      | JST VHR-3N or equivalent | JST SVH-41T-P1.1 or equivalent |
| 2   | -        |                          |                                |
| 3   | ACN      |                          |                                |

DC Output Connector(CN2):TKP P110I-04 or equivalent

| Pin | Function | Mating Housing          | Terminal                         |
|-----|----------|-------------------------|----------------------------------|
| 1   | GND      | JST PHR-4 or equivalent | JST SPH-002T-P0.5L or equivalent |
| 2   | +5VSB    |                         |                                  |
| 3   | GND      |                         |                                  |
| 4   | +12V-FAN |                         |                                  |

DC Output Connector(CN3):TKP P110L-07 or equivalent

| Pin | Function | Mating Housing          | Terminal                         |
|-----|----------|-------------------------|----------------------------------|
| 1   | GND      | JST PHR-7 or equivalent | JST SPH-002T-P0.5L or equivalent |
| 2   | PG/PF    |                         |                                  |
| 3   | FAN-EN   |                         |                                  |
| 4   | PS-ON    |                         |                                  |
| 5   | -Sense   |                         |                                  |
| 6   | +Sense   |                         |                                  |
| 7   | NA       |                         |                                  |

DC Output Connector:KANG YANG PCB-58M4 or equivalent

| Function | The screw locked torque |
|----------|-------------------------|
| Vo-      | M4 7kgf-cm              |
| Vo+      |                         |