




# 480W AC/DC Economical Ultra Slim Industrial DIN Rail Power **XDR-480E** series

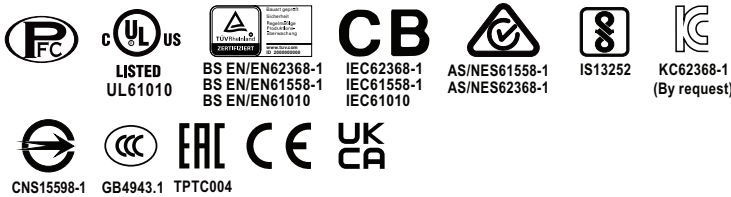

## ■ Features

- 85~264Vac input with PFC
- **Global certificates in multi-fields**  
(ITE 62368-1, Industrial 61558-1/-2-16, 61010)
- **48mm** slim width
- High efficiency up to **96%** and no load power dissipation < **1.2W**
- Built-in **constant current** limiting circuit
- Current sharing up to **1920W (3+1)** for parallel use
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Fanless design, cooling by free air convection
- Over voltage category III (**OVC III**)
- **-40~+70°C** wide range operation temperature (>+50°C derating)
- Operating altitude up to **5000 meters**
- Built-in DC OK relay contact
- Can be installed on DIN rail TS-35/7.5 or 15
- 3 years warranty

## ■ Applications

- Industrial control system
- Semiconductor fabrication equipment
- Factory automation
- Electro-mechanical apparatus
- Battery charger


## ■ GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

## ■ Description

The XDR-480E series is a 480W AC/DC economical ultra slim industrial DIN rail power. Key features of this series include a narrow 48mm casing, optimizing system installation space, and an ultra-wide input range of 85~264Vac suitable for global use. It boasts a maximum efficiency of 96% and a low standby power consumption <1.2W for energy savings and carbon reduction. It has built-in constant current, fanless design, a wide operating temperature range of -40 to +70°C (up to +50°C at full load); OVCIII compliance; parallel function capability up to 1920W; built-in DC OK signal. With comprehensive protection functions, complete safety certifications, and a 3-years warranty, the XDR-480E series is a compact, high-performance, and highly reliable DIN rail power supply.

## ■ Model Encoding

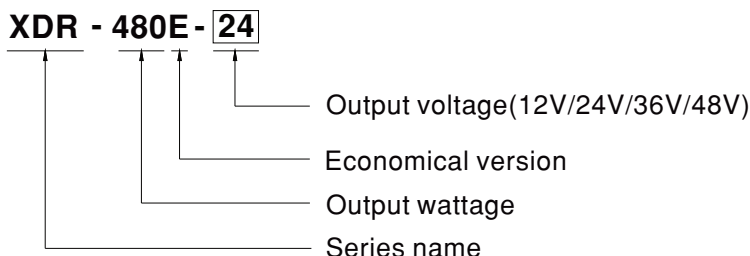


**SPECIFICATION**

MODEL		XDR-480E-12	XDR-480E-24	XDR-480E-36	XDR-480E-48
OUTPUT	DC VOLTAGE	12V	24V	36V	48V
	RATED CURRENT	30A	20A	13.3A	10A
	CURRENT RANGE	0 ~ 30A	0 ~ 20A	0 ~ 13.3A	0 ~ 10A
	RATED POWER	360W	480W	478.8W	480W
	RIPPLE & NOISE (max.) <small>Note.2</small>	100mVp-p	120mVp-p	150mVp-p	150mVp-p
	VOLTAGE ADJ. RANGE	12 ~ 15V	24 ~ 29V	36 ~ 42V	48 ~ 55V
	VOLTAGE TOLERANCE <small>Note.3</small>	±2.0%	±1.0%	±1.0%	±1.0%
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION	±1.0%	±1.0%	±1.0%	±1.0%
	SETUP, RISE TIME	1500ms, 150ms/230Vac    3000ms, 150ms/115Vac at full load			
HOLD UP TIME (Typ.)	15ms/230Vac    15ms/115Vac at full load				
INPUT	AC VOLTAGE RANGE	85 ~ 264Vac			
	DC VOLTAGE RANGE	120 ~ 370Vdc			
	NO LOAD POWER CONSUMPTION (Typ.)	1W @115Vac & 230Vac		1.2W @115Vac & 230Vac	
	FREQUENCY RANGE	47 ~ 63Hz			
	POWDR FACTOR (Typ.)	PF>0.95/230Vac    PF>0.98/115Vac at full load			
	EFFICIENCY (Typ.)	94%	95.5%	95.5%	96%
	AC CURRENT (Typ.)	6A/115Vac    3A/230Vac			
	INRUSH CURRENT (Typ.)	COLD START    15A/115Vac    30A/230Vac			
	LEAKAGE CURRENT	<1mA / 240Vac			
PROTECTION	OVERLOAD	105~130% rated output power Hiccup mode when output voltage <30%, recovers automatically after fault condition is removed Constant current limiting without shutdown within 30%~100% rated output voltage, recovers automatically after fault condition is removed			
	OVER VOLTAGE	Max. 18V	Max. 35V	Max. 50V	Max. 63V
	OVER TEMPERATURE	Protection type : Shut down o/p voltage, recovers automatically after temperature goes down			
FUNCTION	PARALLEL (Droop Mode)	Up to 1920W Max (3+1) units; Please refer to Function Manual for more details			
	DC OK RELAY CONTACT	Relay Contact Ratings (max.): 30Vdc/1A, 30Vac/0.5A resistive load			
ENVIRONMENT	WORKING TEMP.	-40 ~ +70 °C (Refer to "Derating Curve")			
	WORKING HUMIDITY	20 ~ 95% RH non-condensing			
	STORAGE TEMP., HUMIDITY	-40 ~ +85 °C, 10 ~ 95% RH non-condensing			
	TEMP. COEFFICIENT	±0.03% / °C (0 ~ 50 °C)			
	VIBRATION	Component: 10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6			
SAFETY & EMC (Note 6)	SAFETY STANDARDS	UL61010; TUV BS EN/EN62368-1, BS EN/EN61558-1/-2-16, BS EN/EN61010; CB IEC62368-1, IEC61558-1, IEC61010; RCM AS/NZS 62368-1, AS/NZS 61558-1/-2-16; BIS IS13252 (Part 1):2010; BSMI CNS15598-1; CCC GB4943.1; EAC TPTC004 approved; <b>KC KC62368-1 certified, no stock ,contact sale for inquires</b>			
	OVER VOLTAGE CATEGORY <small>Note.4</small>	IEC/EN 61558-1/-2-16 (OVC III, altitude up to 2000m ) IEC/EN/UL 61010 (OVC II, altitude up to 5000m ) IEC/EN 62368-1 (OVC II, altitude up to 5000m )			
	SAFETY EXTRA-LOW VOLTAGE(SELV)	IEC/EN 61558-2-16 (SELV) IEC/EN/UL 61010-2-201 (SELV) IEC/EN 62368-1 (SELV / ES1 )			
	WITHSTAND VOLTAGE	I/P-O/P: 4KVac    I/P-FG: 2KVac    O/P-FG: 1.5KVac    O/P-DC OK: 0.5KVac			
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG: 100M Ohms/500VDC/25 °C / 70%RH			
	EMC EMISSION	Parameter	Standard		Test Level / Note
		Conducted	BS EN/EN55032 (CISPR32) / BS EN/EN61204-3 / CNS15936		Class B
		Radiated	BS EN/EN55032 (CISPR32) / BS EN/EN61204-3 / CNS15936		Class B
		Harmonic Current	BS EN/EN61000-3-2		Class A
	EMC IMMUNITY	Voltage Flicker	BS EN/EN61000-3-2		----
BS EN/EN55035 , BS EN/EN61204-3, BS EN/EN61000-6-2(BS EN/EN50082-2)					
Parameter		Standard		Test Level / Note	
ESD		BS EN/EN61000-4-2		Level 3, 8KV air ; Level 3, 4KV contact; criteria A	
Radiated		BS EN/EN61000-4-3		Level 3, 10V/m ; criteria A	
EFT / Burst		BS EN/EN61000-4-4		Level 2, 2KV ; criteria A	
Surge		BS EN/EN61000-4-5		Level 4, 2KV/Line-Line ; Level 4, 4KV/Line-Line-Chassis ; criteria A	
Conducted		BS EN/EN61000-4-6		Level 3, 10V ; criteria A	
Magnetic Field	BS EN/EN61000-4-8		Level 4, 30A/m ; criteria A		
OTHERS	MTBF	1482.0K hrs min.    Telcordia SR-332 (Bellcore) ;    258.3K hrs min.    MIL-HDBK-217F (25 °C)			
	DIMENSION	<b>48*125.2*125mm (W*H*D)</b>			
	PACKING	890g; 12pcs/13Kg/1.16CUFT			
NOTE	<p>1. All parameters NOT specially mentioned are measured at 230Vac input, rated load and 25 °C of ambient temperature.</p> <p>2. Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 μ F &amp; 47 μ F parallel capacitor.</p> <p>3. Tolerance : includes set up tolerance, line regulation and load regulation.</p> <p>4. The ambient temperature derating of 3.5 °C/1000m with fanless models and of 5 °C/1000m with fan models for operating altitude higher than 2000m(6500ft).</p> <p>5. Installation clearances : 40mm on top, 20mm on the bottom, 5mm on the left and right side are recommended when loaded permanently with full power. In case the adjacent device is a heat source, 15mm clearance is recommended.</p> <p>6. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. (as available on <a href="https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf">https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf</a>)</p> <p>※ Product Liability Disclaimer : For detailed information, please refer to <a href="https://www.meanwell.com/serviceDisclaimer.aspx">https://www.meanwell.com/serviceDisclaimer.aspx</a></p>				




# 480W AC/DC Economical Ultra Slim Industrial DIN Rail Power **XDR-480E** series


## ■ Block Diagram

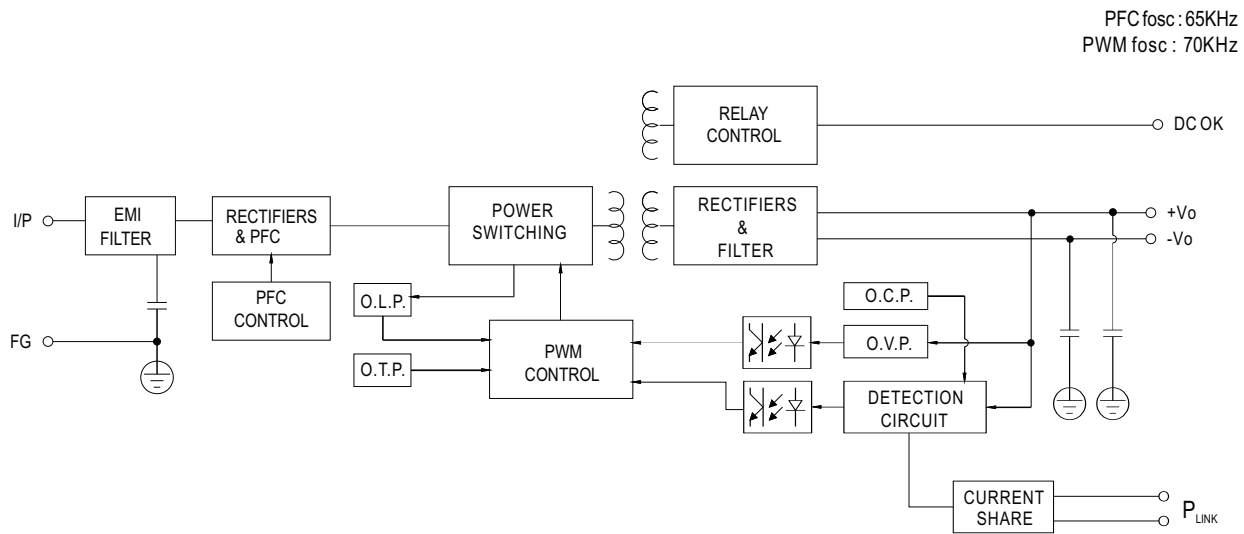

## ■ Derating Curve

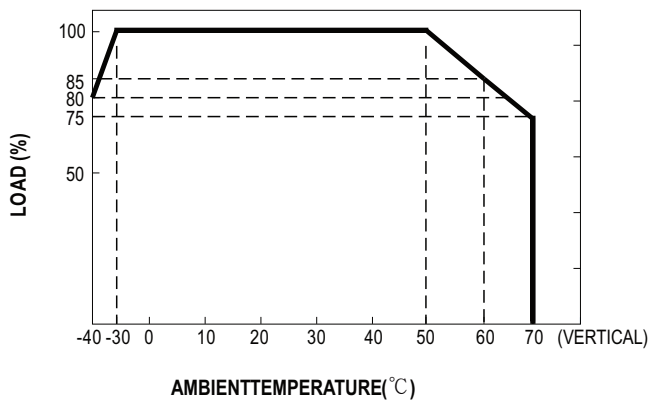

## ■ Static Characteristics

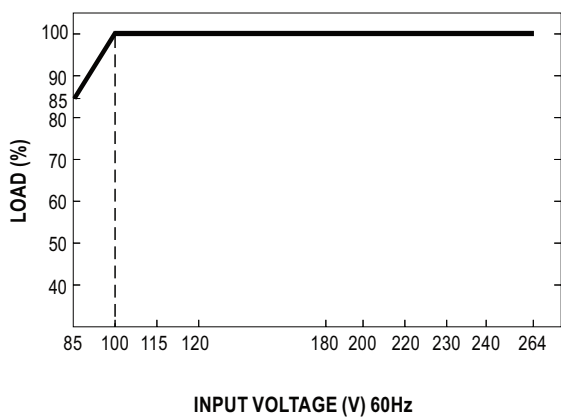




# 480W AC/DC Economical Ultra Slim Industrial DIN Rail Power **XDR-480E** series

## Function Manual

Pin No.	Function	Description
1,2	DC OK Relay Contact	Contact Close: PSU turns ON/DC_OK Contact Open: PSU turns OFF/DC_fail
3,4	Paraller Use Link(P <sub>LINK</sub> )	P <sub>LINK</sub> should be short to enable droop parallel use.(Default disable)

### 1.DC OK Relay Contact

Contact Close	PSU turns ON/DC OK.
Contact Open	PSU turns OFF/DC Fail.
Contact Ratings (max.)	30Vdc/1A, 30Vac/0.5A resistive load.



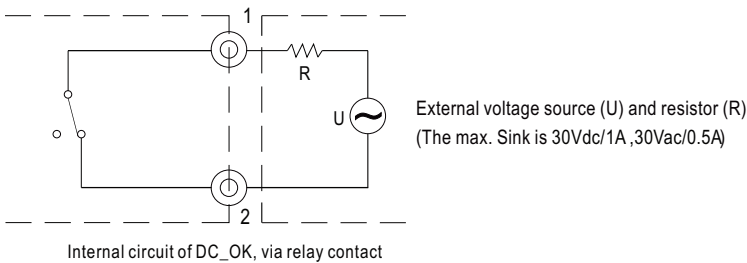


### 2.Parallel Use

XDR-480E has the built-in **droop mode current sharing** function and can be connected in parallel, up to 4 units, to provide higher output power as exhibited below :

- (1) Difference of output voltages among parallel units should be less than **0.1V**.
- (2) The total output current must not exceed the value determined by the following equation (Output current at parallel operation)=(The rated current per unit) x (Number of unit) x 0.9.
- (3) In parallel operation 4 units is the maximum, please consult the manufacture for other applications.
- (4) The power supplies should be paralleled using short and large diameter wiring and then connected to the load.
- (5) When in parallel operation, the minimum output load should be greater than 7% of total output load. (Min. load >7% rated current per unit x number of unit)
- (6) In parallel connection, maybe only one unit (master) operate if the total output load is less than 7% of rated load condition.  
The other PSUs (slaves) may go into standby mode and their output LEDs & relays will not turn on.
- (7) **P<sub>LINK</sub> lines should be shorted locally.**
- (8) The "Parallel Use" mode regulates the output voltage in such a manner that the voltage at no load is approx. 4% higher than at normal load(12V:approx.7%).

For example XDR-480E-24:  
No load output voltage=24V  
Normal load output current=20A  
0~100% load output voltage=24V~23V

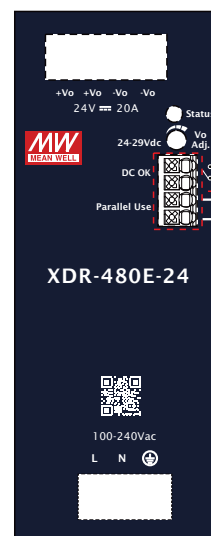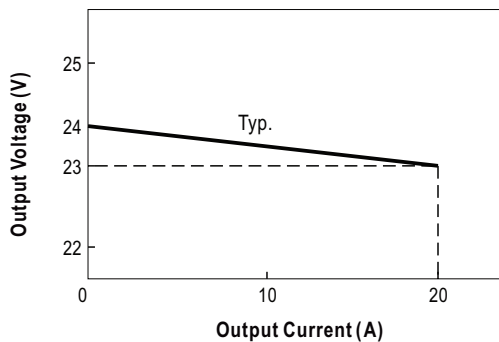

Enable : P<sub>LINK</sub> should be short






# 480W AC/DC Economical Ultra Slim Industrial DIN Rail Power **XDR-480E** series

## ■ Mechanical Specification

(Unit:mm , Tolerance  $\pm 1$ mm)

Case No.303




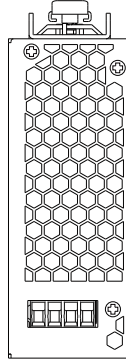


Ⓐ : Terminal Pin No.Assignment

Pin No.	Assignment
1,2	DC Output +Vo
3,4	DC Output -Vo

Ⓑ : Control Pin No.Assignment

Pin No.	Assignment
1,2	DC OK Relay Contact
3,4	Parallel Use Link(Current Sharing)

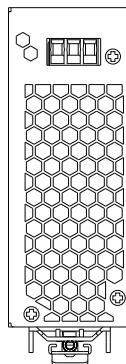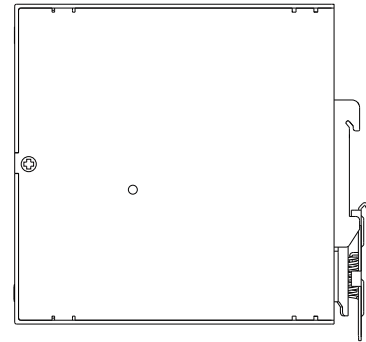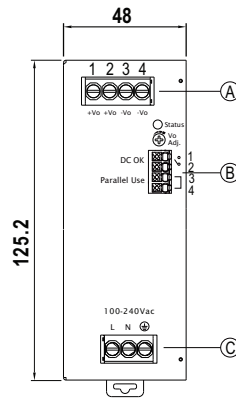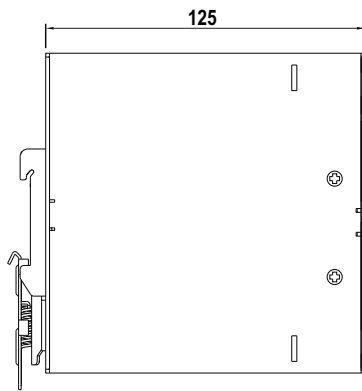

Ⓒ : Terminal Pin No.Assignment

Pin No.	Assignment
1	FG $\oplus$
2	AC/L or DC Input +Vin
3	AC/N or DC Input -Vin


## ■ Recommend Wiring

	AC Input T.B	DC Output T.B	Signal connector
Solid Wire	6mm <sup>2</sup> max.	6mm <sup>2</sup> max.	1.5mm <sup>2</sup> max.
A.W.G	18~10 AWG	18~8 AWG	24~16 AWG
Screw Terminal Torque	9 Lb-In	9 Lb-In	/



## 480W AC/DC Economical Ultra Slim Industrial DIN Rail Power **XDR-480E** series

### ■ Installation Instruction

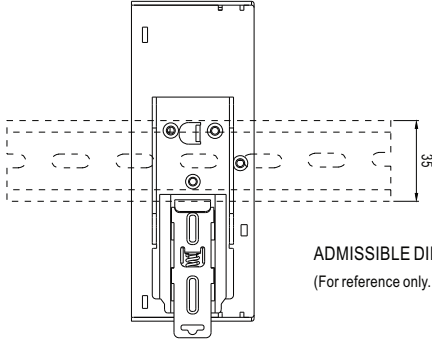

ADMISSIBLE DIN-RAIL: TS35/7.5 OR TS35/15  
(For reference only. Not included with unit.)

This series fits DIN rail TS35/7.5 or TS35/15.  
For installation details, please refer to the Instruction manual.

### ■ Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>