



CBM70S SERIES 70 WATT AC-DC BRICK POWER SUPPLY

Features

- Universal Input Range 90~264V_{ac}
- Efficiency up to 89.5%
- Full Load with Baseplate Cooled and No Fan Required
- Wide Operating Temperature Range
- 17mm Ultra Low Profile Half Brick Package
- Built-in EN55032 Class B Filter
- All in One without External Components
- No Load Input Power Consumption<150mW
- Over Temperature Protection
- Over Voltage Protection
- Continuous Short Circuit Protection
- Safety IEC/EN/UL 62368-1 Approval
- Meets Class I
- Operating Altitude 5000m



MODEL NUMBER	OUTPUT VOLTAGE	OUTPUT CURRENT	RIPPLE & NOISE NOTE2	VOLTAGE ACCURACY NOTE1	LINE REGULATION NOTE3	LOAD REGULATION NOTE4	%EFF. (Typ.) NOTE5
CBM70S120	12 V	5.83 A	120 mV	±1.0%	±0.5%	±1%	88.0%
CBM70S240	24 V	2.92 A	240 mV	±1.0%	±0.5%	±1%	88.5%
CBM70S360	36 V	1.94 A	360 mV	±1.0%	±0.5%	±1%	89.0%
CBM70S480	48 V	1.46 A	480 mV	±1.0%	±0.5%	±1%	89.5%

Note:

1. Voltage accuracy is set at 60% load.
2. Add a 0.1uF ceramic capacitor and a 10uF E.L. capacitor to output for ripple & noise measuring @20MHz BW.
3. Line regulation is measured from 90V_{ac} to 264V_{ac} with full load.
4. Load regulation is measured from 60%±40% rated load.
5. Typical efficiency at 230V_{ac} and full load at 25°C.
6. Power dissipation (Pd): Pd =Pi-Po=Po(1-η)/η.

PART NUMBER

Series	Number of Outputs	Nominal Output Voltage
CBM70	X	XXX
CBM70	S : Single	120 : 12V 240 : 24V 360 : 36V 480 : 48V

Part Number Example:

CBM70S120:70W, Single 12V_{dc} Output



CBM70S Series

TECHNICAL SPECIFICATIONS

(All specifications are typical at nominal input, full load at 25°C unless otherwise noted.)

ABSOLUTE MAXIMUM RATINGS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Input Voltage	Safety approvals only to the AC input	All	90		264	V_{ac}
			127		370	V_{dc}
Operating Case Temperature	At the center of base plate	All	-40		85	°C
Storage Temperature		All	-40		85	°C
Input/Output Isolation Voltage	1 minute	All	3000			V_{ac}
Operating Altitude		All			5000	m

INPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Operating Voltage Range		All	100		240	V_{ac}
Input Frequency Range		All	47		63	Hz
Maximum Input Current	100% Load, $V_{in}=100V_{ac}$	All			1.5	A
Leakage Current		All			3.5	mA
Inrush Current	$V_{in}=240V_{ac}$, Cold start at 25°C	All			100	A
Under Voltage Protection		All	63	70	77	V_{ac}

OUTPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Output Voltage Set Point	V_{in} =Nominal V_{in} , $I_o=60\%$ I_o max, $T_c=25^\circ\text{C}$	CBM70S120	11.88	12	12.12	V_{dc}
		CBM70S240	23.76	24	24.24	
		CBM70S360	35.64	36	36.36	
		CBM70S480	47.52	48	48.48	
Operating Output Current Range	I_o	CBM70S120			5.83	A
		CBM70S240			2.92	
		CBM70S360			1.94	
		CBM70S480			1.46	
Holdup Time	$V_{in}=115V_{ac}$	All		6		ms
Output Voltage Regulation						
Load Regulation	60% load to 100% load & 60% load to 20% load	All			± 1.0	%
Line Regulation	V_{in} =High line to low line	All			± 0.5	%
Output Voltage Trim Range	$P_o \leq$ max rated power, $I_o \leq I_o_{max}$	All	-10		+10	%
Over Current Protection	Hiccup mode, auto recovery	All	110		150	%
Short Circuit Protection	Auto recovery	All				
Over Voltage Protection	Auto recovery	CBM70S120		14	16	V_{dc}
		CBM70S240		28	35	
		CBM70S360		42	50	
		CBM70S480		56	63	
Output Ripple and Noise	1. Add a 0.1uF ceramic capacitor and a 10uF aluminum electrolytic capacitor to output 2. Oscilloscope is 20MHz band width 3. Ambient temperature=25°C	CBM70S120			120	mV
		CBM70S240			240	
		CBM70S360			360	
		CBM70S480			480	
Load Capacitance	1. Input voltage is 115 V_{ac} and 230 V_{ac} 2. Output is max. Load 3. Ambient temperature=25°C	CBM70S120			5830	uF
		CBM70S240			2920	
		CBM70S360			1940	
		CBM70S480			1460	



CBM70S Series

EFFICIENCY

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Efficiency	1. Input voltage is 230V _{ac} 2. Output is rated load 3. Ambient temperature=25°C	CBM70S120		88.0		%
		CBM70S240		88.5		
		CBM70S360		89.0		
		CBM70S480		89.5		

ISOLATION CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Input to Output	1 minute (without dielectric breakdown)	All			3000	V _{ac}
Input to Earth (Ground)	1 minute (without dielectric breakdown)	All			1800	V _{ac}
Output to Earth (Ground)	1 minute (without dielectric breakdown)	All			500	V _{ac}
Isolation Resistance	Input to output	All	100			MΩ

FEATURE CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Switching Frequency		All		65		kHz

GENERAL SPECIFICATIONS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
MTBF	I _o =100%; T _a =25°C per MIL-HDBK-217F	All	550			k hours
Humidity	Nom-condensing	All			93	% RH
Shock	Meets MIL-STD-810F Table 516.5, TABLE 516.5-I 10ms, each axis 3 times (±X、±Y、±Z axis)	All		75		g
Vibration	Meets MIL-STD-810F Table 514.5C-VIII, 15~2000Hz, X、Y、Z axis, 1 hr(each axis), total 3 hrs.	All		4		g
Weight		All		135		grams
Dimensions		All	2.40x2.28x0.67 Inches (61.0x57.9x17.0mm)			
Case Material	Plastic DAP UL 94V-0					
Base Plate Material	Aluminum					
Potting Material	UL 94V-0					
Safety	Class I, IEC/EN/UL62368-1					
EMC Emission	EN55032:2015+AC:2016, EN61204-3:2000, EN61000-6-3:2007+A1:2011+AC:2012, EN61000-6-4:2007+A1:2011, 47 CFR FCC Part 15 Subpart B EN61000-3-2:2014, EN61000-3-3:2013					Class B
Conducted Disturbance	EN55032:2015+AC:2016, EN61204-3:2000, EN61000-6-3:2007+A1:2011+AC:2012, EN61000-6-4:2007+A1:2011, 47 CFR FCC Part 15 Subpart B					Class B
Radiated Disturbance	EN55032:2015+AC:2016, EN61204-3:2000, EN61000-6-3:2007+A1:2011+AC:2012, EN61000-6-4:2007+A1:2011, 47 CFR FCC Part 15 Subpart B					Class B
Harmonic Current Emissions	EN61000-3-2:2014					
Voltage Fluctuations & Flicker	EN61000-3-3:2013					
EMC Immunity	EN55035:2017, EN61204-3:2000, EN61000-6-1:2019, EN61000-6-2:2019					
Electrostatic Discharge (ESD)	IEC 61000-4-2:2008, Air Discharge: ±8kV, Contact Discharge: ±4kV					Criterion A
Radio-Frequency Electromagnetic Field	IEC 61000-4-3:2006+A1:2007+A2:2010					Criterion A
Electrical Fast Transient (EFT)	IEC 61000-4-4:2012, ±1kV, ±2kV					Criterion A
Surge	IEC 61000-4-5:2014+A1:2017 L-N: ±0.5kV, ±1kV, L/N-E(Earth): ±0.5kV, ±1kV, ±2kV					Criterion A





CBM70S Series

GENERAL SPECIFICATIONS

Radio-Frequency Continuous Conducted	IEC 61000-4-6:2013	Criterion A
Power Frequency Magnetic Field	IEC 61000-4-8:2009	Criterion A
Voltage Dips	IEC 61000-4-11:2004+A1:2017, Dip: 30% Reduction, Dip >95% Reduction	Criterion A
Voltage Interruptions	IEC 61000-4-11:2004+A1:2017, >95% Reduction	Criterion B
Application Note Link	CBM70S Series App Notes	


CHARACTERISTIC CURVE

Power Derating Curve

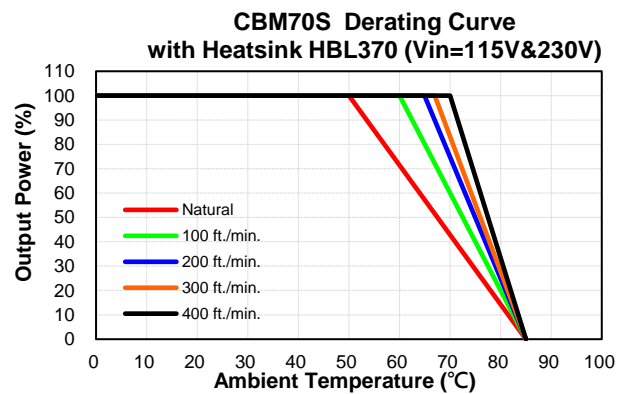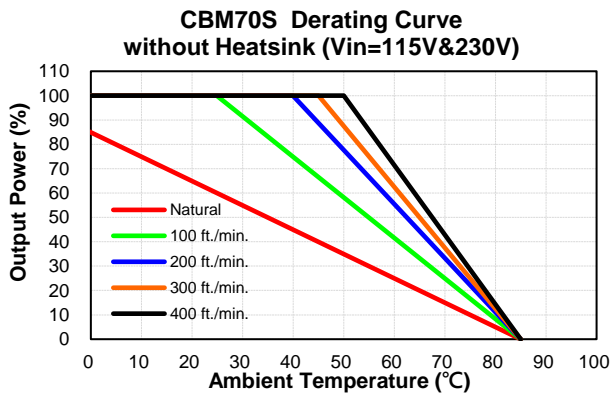


Performance Data


CBM70S120 (Eff Vs Io)

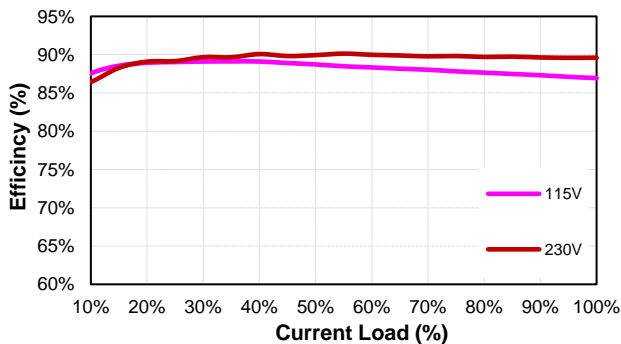


CBM70S240 (Eff Vs Io)

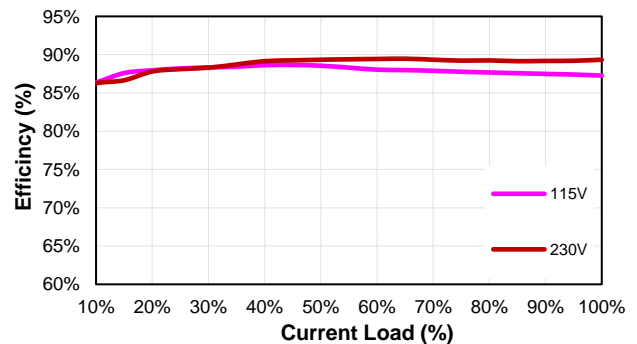

CBM70S360 (Eff Vs Io)

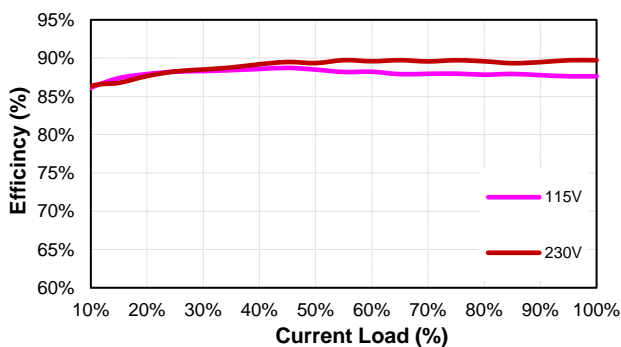


CBM70S480 (Eff Vs Io)

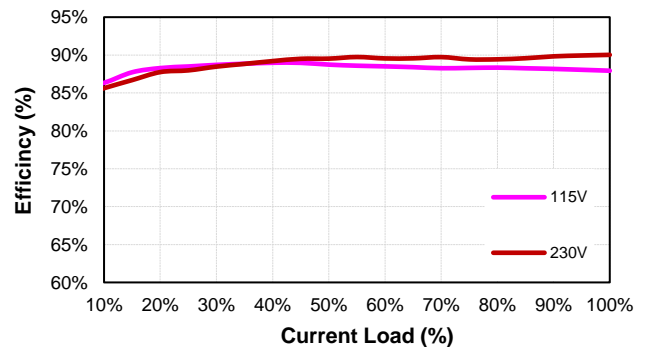




CBM70S Series

MECHANICAL SPECIFICATION

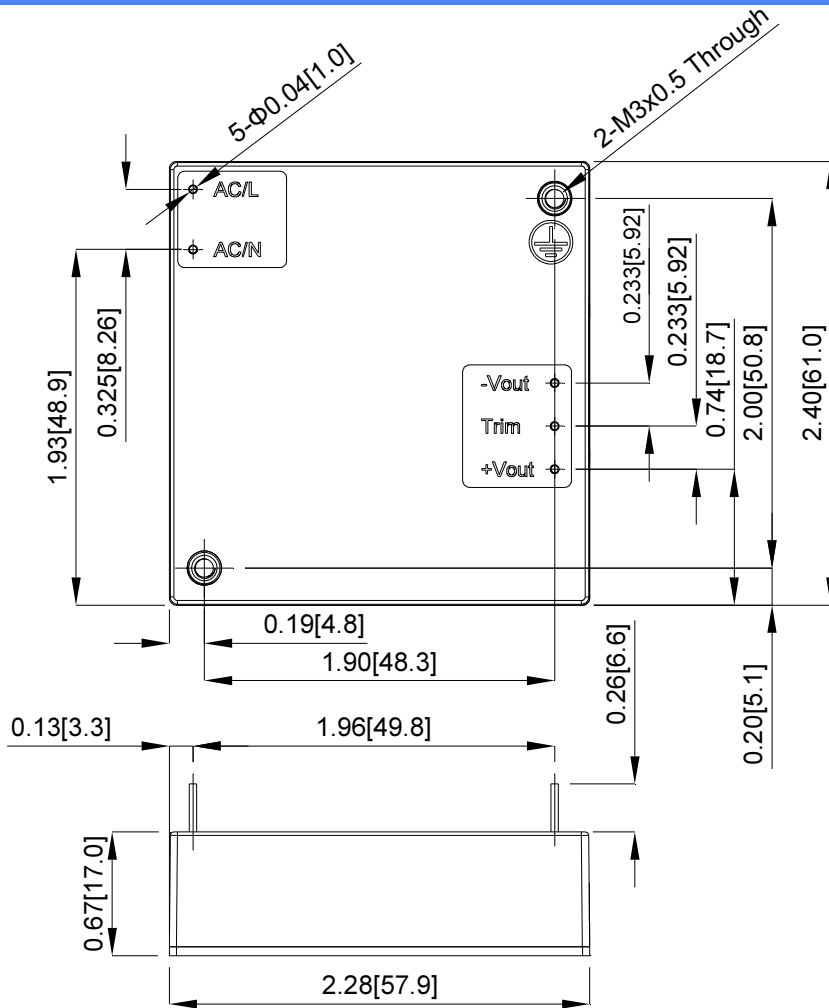

All Dimensions In Inches[mm]
 Tolerance Inches:x.xx = ± 0.02 , x.xxx = ± 0.010
 Millimeters:x.x = ± 0.5 , x.xx = ± 0.25

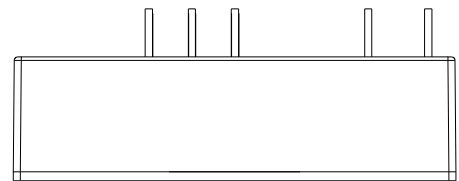

CINCON Electronics Co. Ltd.
 Add: 14F, No. 306, Sec.4, Hsin Yi Rd., Taipei, Taiwan
 Tel: 886-2-27086210
 Fax: 886-2-27029852
 E-mail: sales@cincon.com.tw
 Web: www.cincon.com.tw